

Study of Comprehensive Treatment of Distillery Spent Wash by Adsorption System of Soil and Fly Ash

Bharat Kumar

Department of
Chemistry,

Doon International
School, Dehradun,
248001, U.K., India.

Akash Rawat

Student Class XI
2016-2017,

Doon International
School, Dehradun,
248001, U.K., India.

Arun Upreti

Student Class XI
2016-2017,

Doon International
School, Dehradun,
248001, U.K., India.

Gagandeep Singh

Student Class XI
2016-2017,

Doon International
School, Dehradun,
248001, U.K., India.

Sparsh Munakhia

Student Class XI
2016-2017,

Doon International
School, Dehradun,
248001, U.K., India.

Corresponding Author

Authors' contributions This work was carried out in collaboration between five authors. Author BK designed the study, wrote the protocol and wrote the first draft of the manuscript. Author AU and AR reviewed the experimental design and all drafts of the manuscript. Authors GS and SM managed the analyses of the study. Authors AU, AR, GS and SM performed the statistical analysis. All authors read and approved the final manuscript

ABSTRACT:

Adsorption treatment of distillery spent wash has great potential as a sustainable method as it is a low cost method. The aim of this investigation is to study the treatment method for purification of distillery spent wash by using Soil and Fly ash. For this, the study comprising evaluation of reduction of various physical chemical parameters (Color, Odor, pH, COD, TS, TDS, Ca, Mg, Na and K) of distillery spent wash was checked by passing through the columns of Soil and Fly ash. The distillery effluent was acidic (pH 4.7) and dark brown in color which often cause psychological fear in farmers for utilization. Soil treatment of spent wash exhibited good reduction in COD, TS, TDS, Mg, Na, Ca, after 72 hour treatment and increase in pH toward pH 7 followed by Soil + Fly ash (1:1).

Keywords:

“Absorbent”, “Soil”, “Chemical parameter”,
“Distillery Spent wash”, “Irrigation”, “Fly ash”.

1. INTRODUCTION:

Increasing industrialization and ever increasing population is damaging the environment same is done by the disposal of untreated effluents. Various pollutants produced in industries directly or indirectly are accumulating in our environment.

These pollutants cause severe degradation in pedosphere, hydrosphere, atmosphere and thus causing a potential menace to the health and welfare of mankind. Wastes generated from various industries include the effluents from textile, chemical fertilizers, pulp and paper, petro chemical and breweries, metal processing, automobile manufacturing, power plant including leather and tannery industries and thermal and nuclear power plant etc. Improper disposal methods and inadequate treatment of toxic constituents from different industries have led to the widespread contamination of surface and ground waters and have made the water resources unfit for usage. Hence there is an urgent need for waste water treatment. Environmental pollution by distillery industry has recently been the subject of much research. Distillery waste is one of the major wastes of ecological concern. It is a complex, caramelized and recalcitrant waste containing high percentage of organic matter and heavy metal ions (Nemade and Shri vastava, 2000). This causes pollution in receiving waters as well as in land. To safeguard humanity, we require conducive and congenial environment for which the industrial pollution need to be minimized substantially. To achieve this, several physical, chemical and biological methods/techniques have been developed and being practiced in very few industries along with distilleries (Lin et al 2003).

The reason of limited scope of these techniques lies with their adhered economical solution of the pollution abatement problems, adsorption treatment has been one of the cost effective method and being practical unintentionally during crop irrigation. Once the industrial effluent is suitably treated, it could be applicable for crop irrigation. The application of effluent to short rotation forestry crop is a treatment system which if properly designed and maintained could both increase the productivity of the crops and reduce the waste disposal problem (Sims and Riddell 2001). Keeping this in view, the present study therefore is planned to investigate the land treatment of distillery effluent with following objectives

1. To characterize physico-chemical characteristics (pH, Color, Odor, COD, TS, TDS, Na, K, Mg, and Ca) of distillery spent wash.
2. Effect of Different Textures of Sand and Fly ash on Physico Chemical Characteristics of Distillery Spent Wash.

2. SOIL:

The physical aspects of waste water treatment through land systems involve the processes of filtration and dilution. As water moves through soil, suspended particles are removed by filtration and the filtrate may be diluted with soil water. The rate of these processes is affected by soils physical properties, i.e. the relative proportion of mineral particles of different sizes present in the soil. Sandy soils are said to be 'light' and clayey soils to be 'heavy'. Sandy soils are porous, have high filtration rates and retain less water. In contrast, clayey soils have low infiltration rates, retain much water and may be poorly drained. Soils of intermediate texture such as looms are also intermediate in porosity, drainage and water tension.

3. FLY ASH:

Ash produced in small dark flecks by the burning of powdered coal or other materials and carried into the air is known as fly ash. It is mostly produced from thermal power plants.

4. MATERIAL AND METHODS:

4.1 Sample collection:

Effluents waste water (spent wash) was taken from a distillery, located in Dehradun. The factory uses molasses as the raw material. Samples were collected at main outlet of distillery in the first week of November 2016. Samples were collected five times at weekly from November to December 2016 in clean sterile plastic container and stored at 4°C in a refrigerator.

4.2 Research Design:

Twelve plastic pots were filled with 2 kg soil in each, and wheat was grown (*Triticum aestivum*) Variety UP 2329 .After 20 days of growth, three pots of each group were irrigated with 72 hour, 48 hour and 24 hour treated spent wash respectively and the 4th pot of each was used as control. On each irrigation date 500 ml of treated effluent (24 hour treated, 48 hour treated and 72 hour treated) was poured in each pot as previously discussed. Same time treated samples were collected in sterile reagent bottles for physical and chemical tests and stored at 4°C. Twelve columns of sand, fly ash and sand + fly ash (1:1) were prepared for treatment of distillery spent wash as follows:

Table: 1.1 Designs of Columns of Sand, Fly ash and Sand + Fly ash (1:1)

Columns filled with	Set-1	Set-2	Set-3	Set-4
	(24 hr treatment)	(48 hr treatment)	(72 hr treatment)	CONTROL (C)
Soil (S)	S-1	S-2	S-3	S-C
Fly ash (FA)	FA-1	FA-2	FA-3	FA-C
Soil + Fly ash (1:1)	SF-1	SF-2	SF-2	SF-C

4.3 Physico Chemical Parameters Selected for analysis:

4.3.1 Physical Parameters: Color, Odor, pH, TS, TDS.

4.3.2 Chemical parameters: COD, Ca, Mg, Na & K.

4.4 Measurement of Total Solids (TS): Total solids were determined by measuring the residue left after evaporation of unfiltered samples (APHA 1995).

4.4.1 Calculations

Total Solids (mg/l) = $(A-B) \times 1000 / \text{Vol. of sample (ml)}$.

Where

A= Dry weight of residue + Dish (mg)

B=Weight of Dish (mg).

4.5 Total Dissolved Solids (TDS):

Total dissolved solids are determined by measuring the residue left after evaporation of filtered sample (APHA 1995).

4.6 Measurement of pH:

The pH of effluent was measured by pH meter using a glass electrode pH meter and also by using universal pH indicator solution.

4.7 Measurement of COD:

It is the maximum amount of oxygen that can be consumed by the organic matter in the sample for complete oxidation. It is measured by method described in APHA (1995). In this ferrous ammonium sulphate (0.25M) and potassium dichromate ($K_2Cr_2O_7$) of 0.04167 M are used for titration.

4.7.1 Calculations:

$COD (mg/l) = (A-B) \times M \times 1000 / \text{volume of Sample in ml}$.

Where

A = Volume of FAS used for blank in ml.

B = Volume of FAS used for sample in ml.

M = Molarity of FAS.

FAS = Ferrous Ammonium Sulphate.

4.8 Determination of Ca and Mg:

It was measured by complexometric titration using ethylene di amine tetra acetic acid (EDTA).

4.9 Determination of Na and K:

A characteristic light is produced due to excitation of electrons when the samples with Na/K sprayed into a flame.

The intensity of this characteristics radiation is proportional to the concentration of Na/K and can be read at 529/768nm by using suitable optical filter device (Tondon 1998).

4.10 Fly ash was prepared by burning Lantana camara which is growing in Dehradun at high scale everywhere and becoming a major problem.

5. RESULT:

Table 1.4 shows that visible color of distillery effluent was dark brown having foul smell, with acidic nature (pH 4.7) and contain TS-10000 mg/l, TDS-7600 mg/l, COD-8200 mg/l, Ca-2200 mg/l, Mg-1730 mg/l, Na-800 mg/l, and K-1700 mg/l. Table 1.4 reveals the removal of pollutants from distillery spent wash, which is seen maximum after 72 hour treatment with Soil followed by 48 hour and minimum in 24 hour treatment while minimum changes are seen with Fly ash treatment. After treatment with Soil at various time intervals, pH of spent was increased significantly from 4.7 to 5.9 after 72 hour treatment (Table 1.4). COD (4184 mg/l), TS (4200 mg/l), TDS (4000 mg/l) were found minimum after 72 hour treatment with Soil (Table 1.4), maximum reductions in Ca (447 mg/l), Mg (440 mg/l), Na (320 mg/l), and K (480 mg/l) are seen after 72 hour treatment with Soil (Table 1.4). Maximum reduction in TS, TDS, COD, pH and metallic ions is observed after 72 hour treatment following by 48 hour treatment and minimum change after 24 hour treatment. While after treatment with Fly ash, pH changed to 6.0 ,TS (4167 mg/l),TDS (3918 mg/l),COD (4727 mg/l) ,Ca (351 mg/l),Mg (500 mg/l),Na (272 mg/l) and K (483 mg/l).After 72 hour treatment with Soil + Fly ash (1:1) pH change to 6.0,TS (4250 mg/l), TDS (4130 mg/l),COD(4600 mg/l),Ca (480 mg/l),Mg (530 mg/l),Na (320 mg/l) and K (560 mg/l),Table 1.4.

6. DISCUSSION:

Soil is a good adsorbent for color removal from spent wash and referred discoloration up to 99% while discoloration decreased with increasing concentration,

reduction in COD from distillery effluent was found maximum 48% by using Soil while metallic ions are reduced as Ca (75.45%), Mg (74.57%), Na (60%) and K (72.25%) after 72hour treatment. While with fly ash reductions are seen as COD (42.35%), TS (58.33%), TDS (48.45%), Ca (84.05%), Mg (71.10%), Na (66%), K (71.59%) after 72 hour treatment. With (soil + fly ash (1:1)) following reductions are seen as COD (43.90%), TS (57.5%), TDS (45.66%), Ca (78.18%), Mg (69.36%), Na (60%) and K (67.06%) after 72 hour treatment. Changed distillery spent wash characteristic result in an altered growth of wheat plant and growth of wheat was increased by irrigation with 72 hour treated effluent treated with soil and soil + fly ash (1:1). Effluent was purified at a good level by Soil and Soil + Fly Ash (1:1).

7. CONCLUSION:

On the basis of experimental result it could be conclude that treatment of distillery effluent by using Soil is one of the best adsorption methods for removal of pollutants from distillery spent wash and it can reshape the effluent characteristics so it could be used as irrigation water to reduce the pressure of application of chemical fertilizers and normal water irrigation. The study revealed that the diluted effluent could be beneficial for better growth of wheat plant which also enhances wheat seed germination. The adsorbent treatment method could be profitably practiced for removing the pollutants from distillery effluent and can reduce the ground water contamination. Soil and Soil + Fly ash (1:1) can be used for this purpose successfully at commercial level in industries. Solid waste adsorbed by adsorbent can be used to produce organic manure which needs further research.

ACKNOWLEDGEMENT AND ADDITIONAL INFORMATION

The project was not funded by any agency and was performed in 2016.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

8. REFERENCES:

1. APHA , AWWA , WPCA 1995, Standard Methods for the examination of water and waste water, A.M. Publ. Health Assoc, New York, 19th (ed.).
2. Bharat Kumar, Abhishek Bhatt, Akash Rawat, Anshul Dimri, "Treatment of Distillery Spent Wash for Irrigation Purpose by Using Sand as Adsorbent", International Journal of Novel Research in Life Sciences Vol. 3, Issue 6, pp: (78-82), Novelty Journals.
3. Chandra, R. and Panday, P.K. 2000, "Decolourisation of anaerobically treated distillery effluent by sand adsorption method", in Indian J. Env. Prot, 21(2):134-137.
4. Khoshoo, T.N. 1999, Environmental priorities in India and sustainable development, Presidential address, 73rd session. Indian Science Congress Association, New Delhi. 224.
5. Lee, C.K., Low, K.S. And Gan, P.y. 1999, "Removal of some organic dyes by acid spent bleaching earth", Environ. Technol, 20:99-104.
6. Lin, S.H. and Kiang, C.D. 2003, "Combined physical chemical biological treatment of waste water containing organics from a semi conductor plant", Journal of Hazardous material, 97(1-3): 159-171.
7. Nemade, P.N and Shrivastava, V.S. 1997, "Metals in different effluents and their impacts on ground water and plant tissues", Indian J. Env. Prot, 17(2):133-136.
8. Pathade, G.R., 2001 "A review of current technologies distillery waste water treatment", in Advances in industrial waste water treatment ed. P.K. Goel, Techno science Publication.
9. Sahu, A.K. and Patel, M. 1997, "Effluent treatment technologies based on adsorption and coagulation for environment in pulp and paper industry", IPPTA, 7(1):18-28

10. Srivastava A. and Pathak A.N, 1998, “Modern technologies for distillery effluent treatment”, J. of Scientific and Industrial Research, 57:388-392.

Table: 1.2: Initial Physico Chemical Characteristics of Distillery Spent Wash before Treatment

Parameters	Value
Color	Dark Black Brown
Odor	Foul Molasses
TS	10000 mg/l
TDS	7600 mg/l
pH	4.7
COD	8200 mg/l
Ca	2200 mg/l
Mg	1730 mg/l
Na	800 mg/l
K	1700 mg/l

Table: 1.3: Effect of Sand and Fly ash on Color and Odor of Spent Wash

Parameters	Soil			Fly ash			Soil + Fly ash (1:1)		
	24hr S-1	48hr S-2	72hr S-3	24hr FA-1	48hr FA-2	72hr FA-3	24hr SF-1	48hr SF-2	72hr SF-3
Color	LB	LB	CL	B	LB	LB	LB	CL	CL
Odor	MO	MM	OL	MO	MO	MM	MO	MM	OL

LB: Light Brown, B: Brown, CL: Colorless, MO: Molasses Odor, MM: Mild Molasses, OL: Odorless

Table: 1.4: Physico Chemical Characteristics of Distillery Spent Wash treated with Sand and Fly ash

Para-meters	Original Sample	Soil			Fly ash			Soil+Fly ash (1:1)		
		24hr S-1	48hr S-2	72hr S-3	24hr FA-1	48hr FA-2	72hr FA-3	24hr SF-1	48hr SF-2	72hr SF-3
TS	10000	5400	5000	4200	5625	4792	4167	5530	4890	4250
TDS	7600	4800	5400	4000	4701	4309	3918	4640	4225	4130
pH	4.7	5.5	5.7	5.9	5.2	5.5	6.0	5.3	5.5	6.0
COD	8200	5412	4952	4184	5467	5065	4727	5300	4900	4600
Ca	2200	600	580	540	447	414	351	560	530	480
Mg	1730	520	480	440	562	521	500	590	554	530
Na	800	540	420	320	347	302	272	395	345	320
K	1700	720	640	480	555	519	483	650	600	560


NOTE: All values in mg/lit except pH

TABLE: 1.5: Percent Change in Physico Chemical Characteristics of Distillery Spent Wash Treated with Sand and Fly ash

Para-meters	Original Sample	Soil			Fly ash			Soil+Fly ash (1:1)		
		24hr	48hr	72hr	24hr	48hr	72hr	24hr	48hr	72hr
		S-1	S-2	S-3	FA-1	FA-2	FA-3	SF-1	SF-2	SF-3
TS	10000	-46	-50	-48	-43.75	-52.08	-58.33	-44.70	-51.10	-57.50
TDS	7600	-36.84	-28.36	-47.37	-38.15	-43.30	-48.45	-38.95	-44.41	-45.66
pH	4.7	+17.02	+21.27	+25.53	+10.64	+17.02	+27.66	+12.77	+17.02	+27.66
COD	8200	-34	-39.61	-48.98	-33.33	-38.23	-42.35	-35.37	-40.24	-43.90
Ca	2200	-72.72	-73.64	-75.45	-79.68	-81.18	-84.05	-74.55	-75.91	-78.18
Mg	1730	-69.94	-72.25	-74.57	-67.51	-69.88	-71.10	-65.90	-67.98	-69.36
Na	800	-32.5	-47.5	-60	-56.63	-62.25	-66.00	-50.63	-56.88	-60.00
K	1700	-57.65	-63.00	-72.25	-67.35	-69.47	-71.59	-61.76	-64.71	-67.06

(+Increase,-Decrease)

Physico Chemical Characteristics of Distillery Spent Wash Treated with Soil, Fly ash and Soil + Fly ash (1:1) after 72 hour Treatment

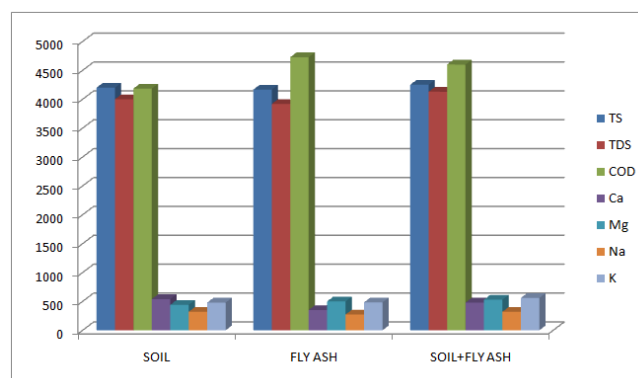

All values are in mg/l.