

Graphical User Authentication through Captcha - A New Way of Protection Based on Hard AI Problems

P.Teja prakash Rao

**M.Tech Student,
Department of CSE,**

Vemu Institute of Technology, Chittoor.

Kumar Raja T

**Assistant Professor,
Department of CSE,**

Vemu Institute of Technology, Chittoor.

ABSTRACT:

Many security primitives are based on hard mathematical problems. Using hard AI problems for security is emerging as an exciting new paradigm, but has been underexplored. In this paper, we present a new security primitive based on hard AI problems, namely, a novel family of graphical password systems built on top of Captcha technology, which we call Captcha as graphical passwords (CaRP). CaRP is both a Captcha and a graphical password scheme. CaRP addresses a number of security problems altogether, such as online guessing attacks, relay attacks, and, if combined with dual-view technologies, shoulder-surfing attacks. Notably, a CaRP password can be found only probabilistically by automatic online guessing attacks even if the password is in the search set. CaRP also offers a novel approach to address the well-known image hotspot problem in popular graphical password systems, such as PassPoints, that often leads to weak password choices. CaRP is not a panacea, but it offers reasonable security and usability and appears to fit well with some practical applications for improving online security.

INTRODUCTION:

A Fundamental task in security is to create cryptographic primitives based on hard mathematical problems that are computationally intractable. For example, the problem of integer factorization is fundamental to the RSA public-key cryptosystem and the Rabin encryption. The discrete logarithm problem is fundamental to the ElGamal encryption, the Diffie-Hellman key exchange, the Digital Signature Algorithm, the elliptic curve cryptography and so on.

Using hard AI (Artificial Intelligence) problems for security, initially proposed in, is an exciting new paradigm. Under this paradigm, the most notable primitive invented is Captcha, which distinguishes human users from computers by presenting a challenge, i.e., a puzzle, beyond the capability of computers but easy for humans. Captcha is now a standard Internet security technique to protect online email and other services from being abused by bots. However, this new paradigm has achieved just a limited success as compared with the cryptographic primitives based on hard math problems and their wide applications. Is it possible to create any new security primitive based on hard AI problems? This is a challenging and interesting open problem.

In this paper, we introduce a new security primitive based on hard AI problems, namely, a novel family of graphical password systems integrating Captcha technology, which we call CaRP (Captcha as gRaphical Passwords). CaRP is click-based graphical passwords, where a sequence of clicks on an image is used to derive a password. Unlike other click-based graphical passwords, images used in CaRP are Captcha challenges, and a new CaRP image is generated for every login attempt. The notion of CaRP is simple but generic. CaRP can have multiple instantiations. In theory, any Captcha scheme relying on multiple-object classification can be converted to a CaRP scheme. We present exemplary CaRPs built on both text Captcha and image-recognition Captcha. One of them is a text CaRP wherein a password is a sequence of characters like a text password, but entered by clicking the right character sequence on CaRP images.

CaRP offers protection against online dictionary attacks on passwords, which have been for long time a major security threat for various online services. This threat is widespread and considered as a top cyber security risk. Defense against online dictionary attacks is a more subtle problem than it might appear. Intuitive countermeasures such as throttling logon attempts do not work well for two reasons:

- 1) It causes denial-of-service attacks (which were exploited to lock highest bidders out in final minutes of eBay auctions) and incurs expensive helpdesk costs for account reactivation.
- 2) It is vulnerable to global password attacks whereby adversaries intend to break into any account rather than a specific one, and thus try each password candidate on multiple accounts and ensure that the number of trials on each account is below the threshold to avoid triggering account lockout.

EXISTING SYSTEM:

Security primitives are based on hard mathematical problems. Using hard AI problems for security is emerging as an exciting new paradigm, but has been underexplored. A Fundamental task in security is to create cryptographic primitives based on hard mathematical problems that are computationally intractable.

DISADVANTAGES

- This paradigm has achieved just a limited success as compared with the cryptographic primitives based on hard math problems and their wide applications.
- Using hard AI (Artificial Intelligence) problems for security, initially proposed, is an exciting new paradigm. Under this paradigm, the most notable primitive invented is Captcha, which distinguishes human users from computers by presenting a challenge.

PROPOSED SYSTEM:

We present a new security primitive based on hard AI problems, namely, a novel family of graphical

password systems built on top of Captcha technology, which we call Captcha as graphical passwords (CaRP). CaRP is both a Captcha and a graphical password scheme. CaRP addresses a number of security problems altogether, such as online guessing attacks, relay attacks, and, if combined with dual-view technologies, shoulder-surfing attacks. Notably, a CaRP password can be found only probabilistically by automatic online guessing attacks even if the password is in the search set. CaRP also offers a novel approach to address the well-known image hotspot problem in popular graphical password systems, such as PassPoints, that often leads to weak password choices.

CaRP is not a panacea, but it offers reasonable security and usability and appears to fit well with some practical applications for improving online security. We present exemplary CaRPs built on both text Captcha and image-recognition Captcha. One of them is a text CaRP wherein a password is a sequence of characters like a text password, but entered by clicking the right character sequence on CaRP images. CaRP offers protection against online dictionary attacks on passwords, which have been for long time a major security threat for various online services. This threat is widespread and considered as a top cyber security risk. Defense against online dictionary attacks is a more subtle problem than it might appear.

ADVANTAGES:

1. It offers reasonable security and usability and appears to fit well with some practical applications for improving online security.
2. This threat is widespread and considered as a top cyber security risk. Defense against online dictionary attacks is a more subtle problem than it might appear.

IMPLEMENTATION:

Implementation is the stage of the project when the theoretical design is turned out into a working system. Thus it can be considered to be the most critical stage in achieving a successful new system and in giving the user, confidence that the new system will work and be

effective. The implementation stage involves careful planning, investigation of the existing system and its constraints on implementation, designing of methods to achieve changeover and evaluation of changeover methods.

MODULE DESCRIPTION:

1. Graphical Password :

In this module, Users are having authentication and security to access the detail which is presented in the Image system. Before accessing or searching the details user should have the account in that otherwise they should register first.

2. Captica in Authentication:

It was introduced to use both Captcha and password in a user authentication protocol, which we call Captcha-based Password Authentication (CbPA) protocol, to counter online dictionary attacks. The CbPA-protocol in requires solving a Captcha challenge after inputting a valid pair of user ID and password unless a valid browser cookie is received. For an invalid pair of user ID and password, the user has a certain probability to solve a Captcha challenge before being denied access.

3. Thwart Guessing Attacks:


In a guessing attack, a password guess tested in an unsuccessful trial is determined wrong and excluded from subsequent trials. The number of undetermined password guesses decreases with more trials, leading to a better chance of finding the password. To counter guessing attacks, traditional approaches in designing graphical passwords aim at increasing the effective password space to make passwords harder to guess and thus require more trials. No matter how secure a graphical password scheme is, the password can always be found by a brute force attack. In this paper, we distinguish two types of guessing attacks: automatic guessing attacks apply an automatic trial and error process but S can be manually constructed whereas human guessing attacks apply a manual trial and error process.

4. Security of Underlying Captcha:

Computational intractability in recognizing objects in CaRP images is fundamental to CaRP. Existing analyses on Captcha security were mostly case by case or used an approximate process. No theoretic security model has been established yet. Object segmentation is considered as a computationally expensive, combinatorially-hard problem, which modern text Captcha schemes rely on.

SCREEN SHOTS:


Home:

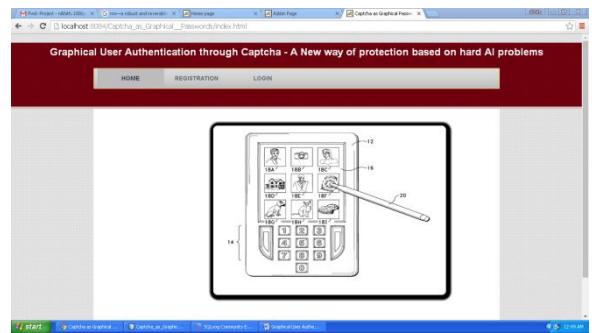


User registration:



Image Captcha:

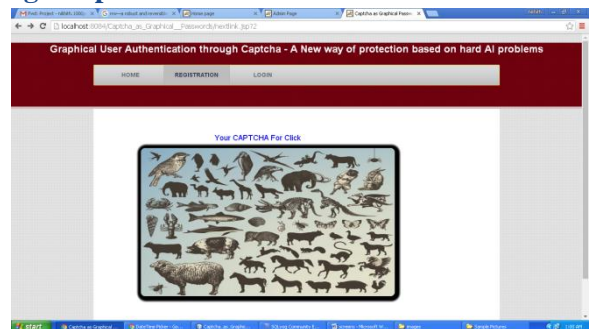

User Home:

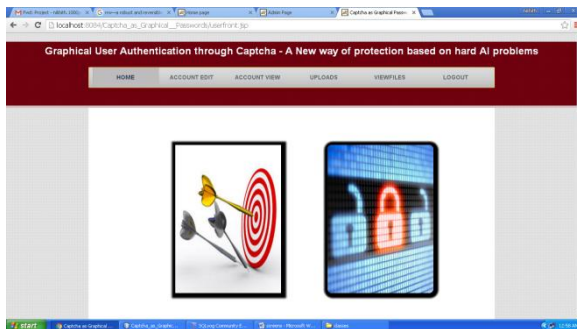

View & Download File:



CONCLUSION

We have proposed CaRP, a new security primitive relying on unsolved hard AI problems. CaRP is both a Captcha and a graphical password scheme. The notion of CaRP introduces a new family of graphical passwords, which adopts a new approach to counter online guessing attacks: a new CaRP image, which is also a Captcha challenge, is used for every login attempt to make trials of an online guessing attack computationally independent of each other. A password of CaRP can be found only probabilistically by automatic online guessing attacks including brute-force attacks, a desired security property that other graphical password schemes lack. Hotspots in CaRP images can no longer be exploited to mount automatic online guessing attacks, an inherent vulnerability in many graphical password systems. CaRP forces adversaries to resort to significantly less efficient and much more costly human-based attacks. In addition to offering protection from online guessing attacks, CaRP is also resistant to Captcha relay attacks, and, if combined with dual-view technologies, shoulder-surfing attacks.

CaRP can also help reduce spam emails sent from a Web email service. Our usability study of two CaRP schemes we have implemented is encouraging. For example, more participants considered AnimalGrid and ClickText easier to use than PassPoints and a combination of text password and Captcha. Both AnimalGrid and ClickText had better password memorability than the conventional text passwords. On the other hand, the usability of CaRP can be further improved by using images of different levels of difficulty based on the login history of the user and the machine used to log in. The optimal tradeoff between security and usability remains an open question for CaRP, and further studies are needed to refine CaRP for actual deployments. Like Captcha, CaRP utilizes unsolved AI problems. However, a password is much more valuable to attackers than a free email account that Captcha is typically used to protect. Therefore there are more incentives for attackers to hack CaRP than Captcha. That is, more efforts will be attracted to the following win-win game by CaRP than ordinary Captcha:

If attackers succeed, they contribute to improving AI by providing solutions to open problems such as segmenting 2D texts. Otherwise, our system stays secure, contributing to practical security. As a framework, CaRP does not rely on any specific Captcha scheme. When one Captcha scheme is broken, a new and more secure one may appear and be converted to a CaRP scheme. Overall, our work is one step forward in the paradigm of using hard AI problems for security. Of reasonable security and usability and practical applications, CaRP has good potential for refinements, which call for useful future work. More importantly, we expect CaRP to inspire new inventions of such AI based security primitives.

REFERENCES:

[1] R. Biddle, S. Chiasson, and P. C. van Oorschot, "Graphical passwords: Learning from the first twelve years," *ACM Comput. Surveys*, vol. 44, no. 4, 2012.

[2] (2012, Feb.). The Science Behind Passfaces [Online]. Available:

<http://www.realuser.com/published/ScienceBehindPassfaces.pdf>

[3] I. Jermyn, A. Mayer, F. Monrose, M. Reiter, and A. Rubin, "The design and analysis of graphical passwords," in Proc. 8th USENIX Security Symp., 1999, pp. 1–15.

[4] H. Tao and C. Adams, "Pass-Go: A proposal to improve the usability of graphical passwords," Int. J. Netw. Security, vol. 7, no. 2, pp. 273–292, 2008.

[5] S. Wiedenbeck, J. Waters, J. C. Birget, A. Brodskiy, and N. Memon, "PassPoints: Design and longitudinal evaluation of a graphical password system," Int. J. HCI, vol. 63, pp. 102–127, Jul. 2005.
ZHU et al.: NEW SECURITY PRIMITIVE BASED ON HARD AI PROBLEMS 903

[6] P. C. van Oorschot and J. Thorpe, "On predictive models and userdrawn graphical passwords," ACM Trans. Inf. Syst. Security, vol. 10, no. 4, pp. 1–33, 2008.

[7] K. Golofit, "Click passwords under investigation," in Proc. ESORICS, 2007, pp. 343–358.

[8] A. E. Dirik, N. Memon, and J.-C. Birget, "Modeling user choice in the passpoints graphical password scheme," in Proc. Symp. Usable Privacy Security, 2007, pp. 20–28.

[9] J. Thorpe and P. C. van Oorschot, "Human-seeded attacks and exploiting hot spots in graphical passwords," in Proc. USENIX Security, 2007, pp. 103–118.

[10] P. C. van Oorschot, A. Salehi-Abari, and J. Thorpe, "Purely automated attacks on passpoints-style graphical passwords," IEEE Trans. Inf. Forensics Security, vol. 5, no. 3, pp. 393–405, Sep. 2010.

[11] P. C. van Oorschot and J. Thorpe, "Exploiting predictability in clickbased graphical passwords," J. Comput. Security, vol. 19, no. 4, pp. 669–702, 2011.

[12] T. Wolverton. (2002, Mar. 26). Hackers Attack eBay Accounts [Online]. Available: <http://www.zdnet.co.uk/news/networking/2002/03/26/hackers-attack-ebay-accounts-2107350/>

[13] HP TippingPoint DV Labs, Vienna, Austria. (2010). Top Cyber Security Risks Report, SANS

Institute and Qualys Research Labs [Online]. Available:

<http://dvlabs.tippingpoint.com/toprisks2010>.

[14] B. Pinkas and T. Sander, "Securing passwords against dictionary attacks," in Proc. ACM CCS, 2002, pp. 161–170.

[15] P. C. van Oorschot and S. Stubblebine, "On countering online dictionary attacks with login histories and humans-in-the-loop," ACM Trans. Inf. Syst. Security, vol. 9, no. 3, pp. 235–258, 2006.